




SHELF TYPE

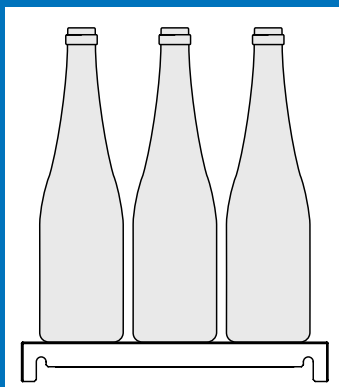


- SR5/01
Stainless steel shelf
(no. 32 bottles)



- ST5/02
Stainless steel horizontal
bottle-handlings tubes
(no. 6 bottles)



- SC5/03
Plexiglas horizontal flat
bottle-handling (no. 7
bottles)



- SI5/04
Plexiglas shelf for
inclined bottles (no. 7
bottles)



Wine Libraries



SINGLE DOOR



DOUBLE DOOR

Shows different shelf options

HEIGHT 2200mm				
Model	WL6/122S	WL6/122P	WL6/222S	WL6/222P
List Price for library only	See Price List			
4 x SR5/01 shelving list price per door	See Price List			
Technical drawings				
External dimensions (mm)	825 x 500 x 2200	825 x 500 x 2200	1550 x 500 x 2200	1550 x 500 x 2200
Doors	1 wall	1 pass-through	2 wall	2 pass-through
Bottles max capacity	128		256	
Working temperature °C	+4/+16		+4/+16 • +4/+16	
Defrosting system	electric automatic			
Max absorbed power (W)	434		867	
Gas	R404a			
Gas quantity (gr)	280		500	
Refrigerant power (W)	426		817	
Input voltage	1x230V - 50Hz			
Noise of condensing unit	< 43 dba			

Wine Libraries



KEY FEATURES

- LED lighting and mirror effect of internal walls ensure ultimate bottle display
- Energy saving LED lighting, thick insulation and double glazing
- 4 shelf style choices
- Easy to assemble
- Two different height options 2200mm or 2600mm

EXTRA SPEC DETAILS

- Power Required – 13 amp
- Automatic Defrost
- Refrigeration system – Fan assisted evaporator and condenser
- Exterior Finish – Stainless Steel (other finishes POA)
- Maximum Ambient Temperature - 25° / 60% RH



HEIGHT 2600mm				
WL6/126S	WL6/126P	WL6/226S	WL6/226P	Model
			See Price List	List Price for library only
			See Price List	4 x SR5/01 shelving list price per door
				Technical drawings
825 x 500 x 2600	825 x 500 x 2600	1550 x 500 x 2600	1550 x 500 x 2600	External dimensions (mm)
1 wall	1 pass-through	2 wall	2 pass-through	Doors
160		320		Bottles max capacity
+4/+16		+4/+16 • +4/+16		Working temperature °C
electric automatic				Defrosting system
434		867		Max absorbed power (W)
R404a				Gas
280		500		Gas quantity (gr)
426		817		Refrigerant power (W)
1x230V - 50Hz				Input voltage
< 43 dba				Noise of condensing unit